




LX-7035

超薄型剪式頂車機

HYDRAULIC DOUBLE-SCISSOR LIFT

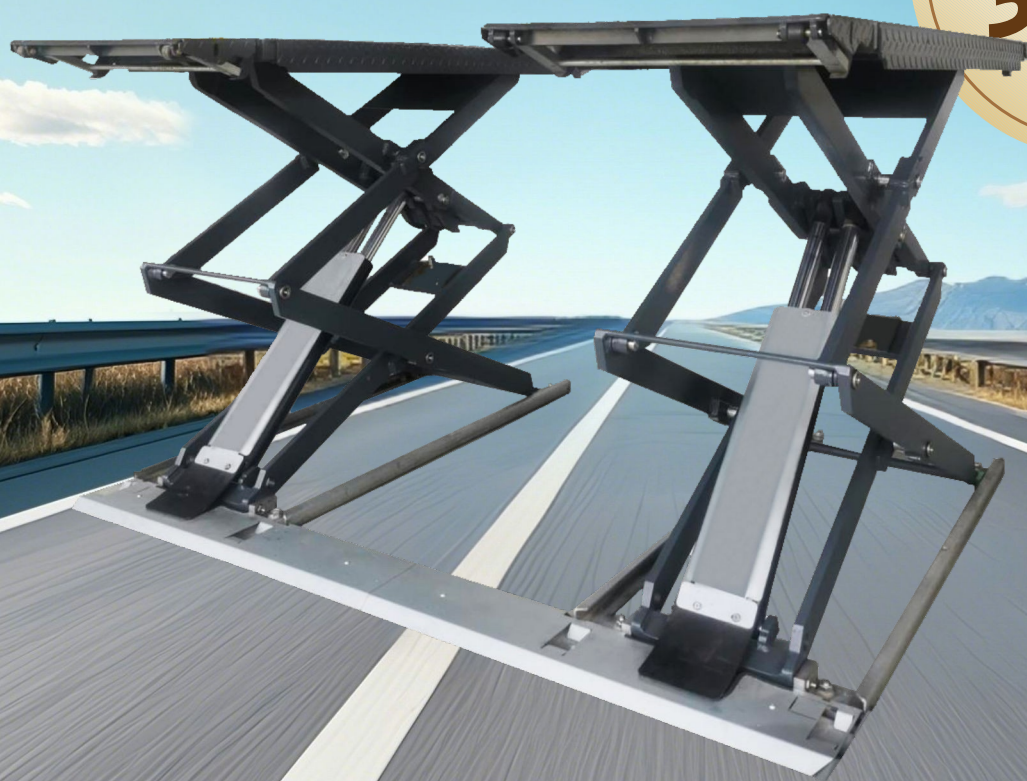

✓ 超薄型 Ultra-thin

✓ 高效率 High-efficiency

無需外接壓縮空氣
No compressed air required


採用先進的雙油壓迴路設計，搭配四支主／副油壓缸，確保頂升同步性與操作安全。頂車平台長度可依需求調整，適用於小型車至商用廂型車等多種車型。

Adopts an advanced dual hydraulic circuit system with four master and auxiliary cylinders, ensuring synchronization and safety. The platform length is easily adjustable, suitable for a wide range of vehicles, from small cars to commercial vans.



頂車平台與引橋板採全花紋防滑設計，有效提

- 升車輛進出及頂升作業的安全性。
- Platform and ramps feature a full-pattern design for effective anti-skid performance.



- 頂車平台最低高度僅 110 mm，可選擇地上式或埋地式安裝。
- **The lifting platform has a thickness of only 110mm and can be installed above ground or inground.**

- 頂車平台可向兩側延伸，適用於不同軸距之車輛。標準型平台長度調整範圍為 1462–2160 mm，另可提供 1462–2260 mm 加長型平台。
- The platform can be extended on both sides, suitable for a wide range of vehicle wheelbases. The standard platform has a length of 1462-2160mm, and an extended version with a length of 1462-2260mm is also available.



- 四油壓缸頂升結構，具備高強度
- 與優異穩定性，提升頂升作業安全性。
- **The four-cylinder hydraulic lifting mechanism offers high strength and ensures safety.**

- 雙油壓迴路設計，確保左右頂車平台同步升降，
- 提升運轉穩定性。
- Double hydraulic circuit design ensures high synchronization of the left and right platforms.

超薄型頂車平台，適用於低底盤車輛維修

Ultra-thin platform, so that even very low chassis vehicles can be served



左右平台之間無機械連接，方便車輛自由通行。


• No mechanical connections between platforms, allowing free passage.

• 安裝寬度可調整，調整範圍為 2000–2100mm。
• Adjustable installation width, ranging from 2000 to 2100 mm.

油浸式馬達設計，散熱效率佳、運轉噪音低、使用壽命長。

• **Oil-submerged motor for better heat dissipation, low noise, and long service life.**

高強度機體結構，額定載重可達 3500 kg，適用於多種車型。
• A sturdy frame capable of lifting multiple vehicle models weighing up to 3500kg.

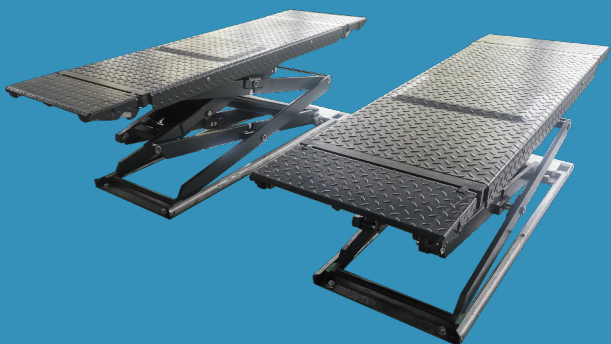

油壓缸免維護

Maintenance-free hydraulic cylinder



無需外接壓縮空氣

No compressed air required



全油壓系統，無機械鎖定機構



Full hydraulic system, no mechanical locks

技術規格 SPECIFICATIONS

型號 Model

LX7035

型號	Model	LX7035
額定載重	Lifting capacity	3500kg
上升時間（約）	Lifting time approx.	37s
下降時間（約）	Lowering time approx.	45s
頂升高度	Lifting height	1960mm
最低高度	Minimum height	110mm
總寬度	Overall width	2000mm
頂車平台寬度	Platform width	605mm
頂車平台長度	Platform length	1462-2160mm
馬達功率	Motor power	3kW
電源	Power supply	3~/N+PE 220~380V 50~60Hz

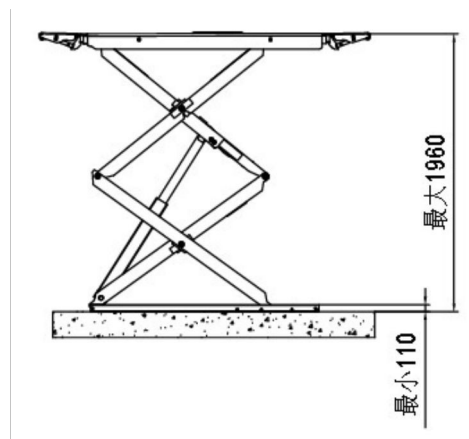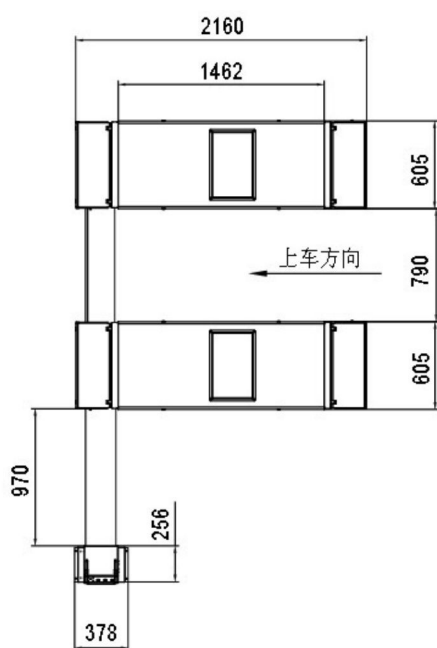

Contact us 聯絡資訊

Felice Taiwan

Email 電子郵件 : felicetw886@gmail.com

Website 官方網站 : www.felice.com.tw